

# RF2 series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 350 l/min



# FILTER SIZING

## INDEX

|                   | Page |
|-------------------|------|
| CALCULATION       | 23   |
| CORRECTIVE FACTOR | 24   |

**THE CORRECT FILTER SIZING HAVE TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING BY THE APPLICATION.**

FOR EXAMPLE, THE MAXIMUM TOTAL PRESSURE DROP ALLOWED BY A NEW AND CLEAN RETURN FILTER HAVE TO BE IN THE RANGE 0.4 ÷ 0.6 bar.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop  $\Delta p_c$  of the housing is proportional to the fluid density ( $\text{kg}/\text{dm}^3$ ); all the graphs in the catalogue are referred to mineral oil with density of  $0.86 \text{ kg}/\text{dm}^3$ .

The filter element pressure drop  $\Delta p_e$  is proportional to its viscosity ( $\text{mm}^2/\text{s}$ ), the corrective factor Y have to be used in case of an oil viscosity different than  $30 \text{ mm}^2/\text{s}$  (cSt).

**Sizing data for single filter element, head at top**

$\Delta p_c$  = Filter housing pressure drop [bar]

$\Delta p_e$  = Filter element pressure drop [bar]

Y = Corrective factor Y (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media

Q = flow rate (l/min)

V1 reference oil viscosity =  $30 \text{ mm}^2/\text{s}$  (cSt)

V2 = operating oil viscosity in  $\text{mm}^2/\text{s}$  (cSt)

**Filter element pressure drop calculation with an oil viscosity different than  $30 \text{ mm}^2/\text{s}$  (cSt)**

$\Delta p_e = Y : 1000 \times Q \times (V2:V1)$

$\Delta p_{\text{Tot.}} = \Delta p_c + \Delta p_e$

**Verification formula**

$\Delta p_{\text{Tot.}} \leq \Delta p_{\text{max allowed}}$

**Maximum total pressure drop ( $\Delta p_{\text{max}}$ ) allowed by a new and clean filter**

| Application                   | Range (bar)                         |
|-------------------------------|-------------------------------------|
| Suction filters               | 0.08 ÷ 0.10                         |
| Return filters                | 0.4 ÷ 0.6                           |
|                               | 0.4 ÷ 0.6 return lines              |
|                               | 0.3 ÷ 0.5 lubrication lines         |
| Low & Medium Pressure filters | 0.3 ÷ 0.4 off-line in power systems |
|                               | 0.1 ÷ 0.3 off-line in test benches  |
|                               | 0.4 ÷ 0.6 over-boost                |
| High Pressure filters         | 0.8 ÷ 1.5                           |
| Stainless Steel filters       | 0.8 ÷ 1.5                           |

**Generic filter calculation example**

Application data:

Tank top return filter

Pressure Pmax = 10 bar

Flow rate Q = 120 l/min

Viscosity V2 =  $46 \text{ mm}^2/\text{s}$  (cSt)


Oil density =  $0.86 \text{ kg}/\text{dm}^3$

Required filtration efficiency =  $25 \mu\text{m}$  with absolute filtration

With bypass valve and G 1 1/4" inlet connection

Calculation:

$\Delta p_c = 0.03 \text{ bar}$  (see graphic below)

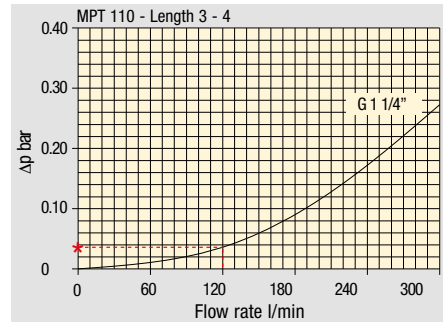

Filter housings  $\Delta p$  pressure drop. The curves are plotted using mineral oil with density of  $0.86 \text{ kg}/\text{dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

$\Delta p_e = (2.00 : 1000) \times 120 \times (46 : 30) = 0.37 \text{ bar}$

| Filter element | Absolute filtration H Series |       |       |       |      | Nominal filtration N Series |      |             |
|----------------|------------------------------|-------|-------|-------|------|-----------------------------|------|-------------|
|                | A03                          | A06   | A10   | A16   | A25  | P10                         | P25  | M25 M60 M90 |
| Type           |                              |       |       |       |      |                             |      |             |
| Return filters |                              |       |       |       |      |                             |      |             |
| MF 020         | 74.00                        | 50.08 | 20.00 | 16.00 | 9.00 | 6.43                        | 5.51 | 4.40        |
|                | 2                            | 29.20 | 24.12 | 8.00  | 7.22 | 5.00                        | 3.33 | 2.85        |
|                | 3                            | 22.00 | 19.00 | 6.56  | 5.33 | 4.33                        | 1.68 | 1.44        |
| MF 030         | 74.00                        | 50.08 | 20.00 | 16.00 | 9.00 | 6.43                        | 5.51 | 3.40        |
| MFX 030        | 1                            | 28.20 | 24.40 | 8.67  | 8.17 | 6.88                        | 4.62 | 3.96        |
|                | 2                            | 17.33 | 12.50 | 6.86  | 5.70 | 4.00                        | 3.05 | 2.47        |
|                | 3                            | 10.25 | 9.00  | 3.65  | 3.33 | 2.50                        | 1.63 | 1.32        |
|                | 4                            | 6.10  | 5.40  | 2.30  | 2.20 | 2.00                        | 1.19 | 0.96        |
| MF 100         |                              |       |       |       |      |                             |      |             |
| MFX 100        |                              |       |       |       |      |                             |      |             |

$\Delta p_{\text{Tot.}} = 0.03 + 0.37 = 0.4 \text{ bar}$

The selection is correct because the total pressure drop value is inside the admissible range for top tank return filters.

In case the allowed max total pressure drop is not verified, it is necessary to repeat the calculation changing the filter length/size.

# FILTER SIZING Corrective factor

Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.  
Reference oil viscosity 30 mm<sup>2</sup>/s

## Return filters

| Filter element    | Absolute filtration<br>H Series |       |       |       |       | Nominal filtration<br>N Series |      |      |                   |
|-------------------|---------------------------------|-------|-------|-------|-------|--------------------------------|------|------|-------------------|
|                   | Type                            | A03   | A06   | A10   | A16   | A25                            | P10  | P25  | M25<br>M60<br>M90 |
| MF 020            | 1                               | 74.00 | 50.08 | 20.00 | 16.00 | 9.00                           | 6.43 | 5.51 | 4.40              |
|                   | 2                               | 29.20 | 24.12 | 8.00  | 7.22  | 5.00                           | 3.33 | 2.85 | 2.00              |
|                   | 3                               | 22.00 | 19.00 | 6.56  | 5.33  | 4.33                           | 1.68 | 1.44 | 1.30              |
| MF 030<br>MFX 030 | 1                               | 74.00 | 50.08 | 20.00 | 16.00 | 9.00                           | 6.43 | 5.51 | 3.40              |
| MF 100<br>MFX 100 | 1                               | 28.20 | 24.40 | 8.67  | 8.17  | 6.88                           | 4.62 | 3.96 | 1.25              |
|                   | 2                               | 17.33 | 12.50 | 6.86  | 5.70  | 4.00                           | 3.05 | 2.47 | 1.10              |
|                   | 3                               | 10.25 | 9.00  | 3.65  | 3.33  | 2.50                           | 1.63 | 1.32 | 0.96              |
|                   | 4                               | 6.10  | 5.40  | 2.30  | 2.20  | 2.00                           | 1.19 | 0.96 | 0.82              |
| MF 180<br>MFX 180 | 1                               | 3.67  | 3.05  | 1.64  | 1.56  | 1.24                           | 1.18 | 1.06 | 0.26              |
|                   | 2                               | 1.69  | 1.37  | 0.68  | 0.54  | 0.51                           | 0.43 | 0.39 | 0.12              |
| MF 190<br>MFX 190 | 2                               | 1.69  | 1.37  | 0.60  | 0.49  | 0.44                           | 0.35 | 0.31 | 0.11              |
| MF 400<br>MFX 400 | 1                               | 3.20  | 2.75  | 1.39  | 1.33  | 1.06                           | 0.96 | 0.87 | 0.22              |
|                   | 2                               | 2.00  | 1.87  | 0.88  | 0.85  | 0.55                           | 0.49 | 0.45 | 0.13              |
|                   | 3                               | 1.90  | 1.60  | 0.63  | 0.51  | 0.49                           | 0.39 | 0.35 | 0.11              |
| MF 750<br>MFX 750 | 1                               | 1.08  | 0.84  | 0.49  | 0.36  | 0.26                           | 0.21 | 0.19 | 0.06              |
| MLX 250           | 2                               | 3.00  | 3.04  | 1.46  | 1.25  | 1.17                           | -    | -    | M25<br>0.20       |
| MLX 660           | 2                               | 1.29  | 1.26  | 0.52  | 0.44  | 0.38                           | -    | -    | M25<br>0.10       |
| CU 025            |                                 | 78.00 | 48.00 | 28.00 | 24.00 | 9.33                           | 9.33 | 8.51 | 1.25              |
| CU 040            |                                 | 25.88 | 20.88 | 10.44 | 10.00 | 3.78                           | 3.78 | 3.30 | 1.25              |
| CU 100            |                                 | 15.20 | 14.53 | 5.14  | 4.95  | 2.00                           | 2.00 | 0.17 | 1.10              |
| CU 250            |                                 | 3.25  | 2.55  | 1.55  | 1.35  | 0.71                           | 0.71 | 0.59 | 0.25              |
| CU 630            |                                 | 1.96  | 1.68  | 0.85  | 0.72  | 0.42                           | 0.42 | 0.36 | 0.09              |
| CU 850            |                                 | 1.06  | 0.84  | 0.42  | 0.33  | 0.17                           | 0.17 | 0.13 | 0.04              |
| MR 100            | 1                               | 19.00 | 17.00 | 6.90  | 6.30  | 4.60                           | 2.94 | 2.52 | 1.60              |
|                   | 2                               | 11.70 | 10.80 | 4.40  | 4.30  | 3.00                           | 2.94 | 2.52 | 1.37              |
|                   | 3                               | 7.80  | 6.87  | 3.70  | 3.10  | 2.70                           | 2.14 | 1.84 | 1.34              |
|                   | 4                               | 5.50  | 4.97  | 2.60  | 2.40  | 2.18                           | 1.72 | 1.47 | 1.34              |
|                   | 5                               | 4.20  | 3.84  | 2.36  | 2.15  | 1.90                           | 1.60 | 1.37 | 1.34              |
| MR 250            | 1                               | 5.35  | 4.85  | 2.32  | 1.92  | 1.50                           | 1.38 | 1.20 | 0.15              |
|                   | 2                               | 4.00  | 3.28  | 1.44  | 1.10  | 1.07                           | 0.96 | 0.83 | 0.13              |
|                   | 3                               | 2.60  | 2.20  | 1.08  | 1.00  | 0.86                           | 0.77 | 0.64 | 0.12              |
|                   | 4                               | 1.84  | 1.56  | 0.68  | 0.56  | 0.44                           | 0.37 | 0.23 | 0.11              |
| MR 630            | 1                               | 3.10  | 2.48  | 1.32  | 1.14  | 0.92                           | 0.83 | 0.73 | 0.09              |
|                   | 2                               | 2.06  | 1.92  | 0.82  | 0.76  | 0.38                           | 0.33 | 0.27 | 0.08              |
|                   | 3                               | 1.48  | 1.30  | 0.60  | 0.56  | 0.26                           | 0.22 | 0.17 | 0.08              |
|                   | 4                               | 1.30  | 1.20  | 0.48  | 0.40  | 0.25                           | 0.21 | 0.16 | 0.08              |
|                   | 5                               | 0.74  | 0.65  | 0.30  | 0.28  | 0.13                           | 0.10 | 0.08 | 0.04              |
| MR 850            | 1                               | 0.60  | 0.43  | 0.34  | 0.25  | 0.13                           | 0.12 | 0.09 | 0.03              |
|                   | 2                               | 0.37  | 0.26  | 0.23  | 0.21  | 0.11                           | 0.08 | 0.07 | 0.03              |
|                   | 3                               | 0.27  | 0.18  | 0.17  | 0.17  | 0.05                           | 0.04 | 0.04 | 0.02              |
|                   | 4                               | 0.23  | 0.16  | 0.13  | 0.12  | 0.04                           | 0.03 | 0.03 | 0.02              |

## Return / Suction filters

| Filter element | Absolute filtration |      |      |      |
|----------------|---------------------|------|------|------|
|                | Type                | A10  | A16  | A25  |
| RSX 116        | 1                   | 5.12 | 4.33 | 3.85 |
|                | 2                   | 2.22 | 1.87 | 1.22 |
| RSX 165        | 1                   | 2.06 | 1.75 | 1.46 |
|                | 2                   | 1.24 | 1.05 | 0.96 |
|                | 3                   | 0.94 | 0.86 | 0.61 |

| Filter element | Absolute filtration<br>N Series |       |       |      |      |      |      |      |                   |
|----------------|---------------------------------|-------|-------|------|------|------|------|------|-------------------|
|                | Type                            | A03   | A06   | A10  | A16  | A25  | P10  | P25  | M25<br>M60<br>M90 |
| CU 110         | 1                               | 16.25 | 15.16 | 8.75 | 8.14 | 5.87 | 2.86 | 2.65 | 0.14              |
|                | 2                               | 12.62 | 10.44 | 6.11 | 6.02 | 4.16 | 1.60 | 1.49 | 0.12              |
|                | 3                               | 8.57  | 7.95  | 5.07 | 4.07 | 2.40 | 1.24 | 1.15 | 0.11              |
|                | 4                               | 5.76  | 4.05  | 2.80 | 2.36 | 1.14 | 0.91 | 0.85 | 0.05              |

## Low & Medium pressure filters

| Filter element | Absolute filtration<br>N-W Series |       |       |      |      | Nominal filtration<br>N Series |      |      |      |
|----------------|-----------------------------------|-------|-------|------|------|--------------------------------|------|------|------|
|                | Type                              | A03   | A06   | A10  | A16  | A25                            | P10  | P25  | M25  |
| CU 110         | 1                                 | 16.25 | 15.16 | 8.75 | 8.14 | 5.87                           | 2.86 | 2.65 | 0.14 |
|                | 2                                 | 12.62 | 10.44 | 6.11 | 6.02 | 4.15                           | 1.60 | 1.49 | 0.12 |
|                | 3                                 | 8.57  | 7.95  | 5.07 | 4.07 | 2.40                           | 1.24 | 1.15 | 0.11 |
|                | 4                                 | 5.76  | 4.05  | 2.80 | 2.36 | 1.14                           | 0.91 | 0.85 | 0.05 |
| CU 210         | 1                                 | 5.30  | 4.80  | 2.00 | 1.66 | 1.32                           | 0.56 | 0.43 | 0.12 |
|                | 2                                 | 3.44  | 2.95  | 1.24 | 1.09 | 0.70                           | 0.42 | 0.35 | 0.09 |
|                | 3                                 | 2.40  | 1.70  | 0.94 | 0.84 | 0.54                           | 0.33 | 0.23 | 0.05 |
| DN             | 016                               | 7.95  | 7.20  | 3.00 | 2.49 | 1.98                           | 0.84 | 0.65 | 0.18 |
|                | 025                               | 5.00  | 4.53  | 1.89 | 1.57 | 1.25                           | 0.53 | 0.41 | 0.11 |
|                | 040                               | 3.13  | 2.66  | 1.12 | 0.98 | 0.63                           | 0.38 | 0.32 | 0.08 |
| CU 400         | 2                                 | 3.13  | 2.55  | 1.46 | 1.22 | 0.78                           | 0.75 | 0.64 | 0.19 |
|                | 3                                 | 2.15  | 1.70  | 0.94 | 0.78 | 0.50                           | 0.40 | 0.34 | 0.10 |
|                | 4                                 | 1.60  | 1.28  | 0.71 | 0.61 | 0.40                           | 0.34 | 0.27 | 0.08 |
|                | 5                                 | 1.00  | 0.83  | 0.47 | 0.34 | 0.20                           | 0.24 | 0.19 | 0.06 |
|                | 6                                 | 0.82  | 0.58  | 0.30 | 0.27 | 0.17                           | 0.22 | 0.18 | 0.05 |
|                | CU 900                            | 1     | 0.86  | 0.63 | 0.32 | 0.30                           | 0.21 | -    | -    |
| CU 950         | 2                                 | 1.03  | 0.80  | 0.59 | 0.40 | 0.26                           | -    | -    | 0.05 |
|                | 3                                 | 0.44  | 0.40  | 0.27 | 0.18 | 0.15                           | -    | -    | 0.02 |
| MR 630         | 7                                 | 0.88  | 0.78  | 0.36 | 0.34 | 0.16                           | 0.12 | 0.96 | 0.47 |

**Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.**  
Reference oil viscosity 30 mm<sup>2</sup>/s

## High pressure filters

| Filter element |   | Absolute filtration<br>N - R Series |        |        |        |        | Nominal filtration<br>N Series |
|----------------|---|-------------------------------------|--------|--------|--------|--------|--------------------------------|
| Type           |   | A03                                 | A06    | A10    | A16    | A25    | M25                            |
| HP 011         | 1 | 332.71                              | 250.07 | 184.32 | 152.36 | 128.36 | -                              |
|                | 2 | 220.28                              | 165.56 | 74.08  | 59.13  | 37.05  | -                              |
|                | 3 | 123.24                              | 92.68  | 41.48  | 33.08  | 20.72  | -                              |
|                | 4 | 77.76                               | 58.52  | 28.37  | 22.67  | 16.17  | -                              |
| HP 039         | 2 | 70.66                               | 53.20  | 25.77  | 20.57  | 14.67  | 4.90                           |
|                | 3 | 36.57                               | 32.28  | 18.00  | 13.38  | 8.00   | 2.90                           |
|                | 4 | 26.57                               | 23.27  | 12.46  | 8.80   | 5.58   | 2.20                           |
| HP 050         | 1 | 31.75                               | 30.30  | 13.16  | 12.3   | 7.29   | 1.60                           |
|                | 2 | 24.25                               | 21.26  | 11.70  | 9.09   | 4.90   | 1.40                           |
|                | 3 | 17.37                               | 16.25  | 8.90   | 7.18   | 3.63   | 1.25                           |
|                | 4 | 12.12                               | 10.75  | 6.10   | 5.75   | 3.08   | 1.07                           |
|                | 5 | 7.00                                | 6.56   | 3.60   | 3.10   | 2.25   | 0.80                           |
| HP 065         | 1 | 58.50                               | 43.46  | 23.16  | 19.66  | 10.71  | 1.28                           |
|                | 2 | 42.60                               | 25.64  | 16.22  | 13.88  | 7.32   | 1.11                           |
|                | 3 | 20.50                               | 15.88  | 8.18   | 6.81   | 3.91   | 0.58                           |
| HP 135         | 1 | 20.33                               | 18.80  | 9.71   | 8.66   | 4.78   | 2.78                           |
|                | 2 | 11.14                               | 10.16  | 6.60   | 6.38   | 2.22   | 1.11                           |
|                | 3 | 6.48                                | 6.33   | 3.38   | 3.16   | 2.14   | 1.01                           |
| HP 150         | 1 | 17.53                               | 15.91  | 7.48   | 6.96   | 5.94   | 1.07                           |
|                | 2 | 8.60                                | 8.37   | 3.54   | 3.38   | 3.15   | 0.58                           |
|                | 3 | 6.53                                | 5.90   | 2.93   | 2.79   | 2.12   | 0.49                           |
| HP 320         | 1 | 10.88                               | 9.73   | 5.02   | 3.73   | 2.54   | 1.04                           |
|                | 2 | 4.40                                | 3.83   | 1.75   | 1.48   | 0.88   | 0.71                           |
|                | 3 | 2.75                                | 2.11   | 1.05   | 0.87   | 0.77   | 0.61                           |
|                | 4 | 2.12                                | 1.77   | 0.98   | 0.78   | 0.55   | 0.47                           |
| HP 500         | 1 | 4.44                                | 3.67   | 2.30   | 2.10   | 1.65   | 0.15                           |
|                | 2 | 3.37                                | 2.77   | 1.78   | 1.68   | 1.24   | 0.10                           |
|                | 3 | 2.22                                | 1.98   | 1.11   | 1.09   | 0.75   | 0.08                           |
|                | 4 | 1.81                                | 1.33   | 0.93   | 0.86   | 0.68   | 0.05                           |
|                | 5 | 1.33                                | 1.15   | 0.77   | 0.68   | 0.48   | 0.04                           |

| Filter element |   | Absolute filtration<br>N Series |      |      |      |      | Nominal filtration<br>N Series |
|----------------|---|---------------------------------|------|------|------|------|--------------------------------|
| Type           |   | A03                             | A06  | A10  | A16  | A25  | M25                            |
| HF 320         | 1 | 3.65                            | 2.95 | 2.80 | 1.80 | 0.90 | 0.38                           |
|                | 2 | 2.03                            | 1.73 | 1.61 | 1.35 | 0.85 | 0.36                           |
|                | 3 | 1.84                            | 1.42 | 1.32 | 1.22 | 0.80 | 0.35                           |

## Suction filters

| Filter element |  | Nominal filtration<br>N Series |     |
|----------------|--|--------------------------------|-----|
| Type           |  | P10                            | P25 |
| SF 250         |  | 65                             | 21  |

## Stainless steel high pressure filters

| Filter element |   | Absolute filtration<br>N Series |        |        |        |        |
|----------------|---|---------------------------------|--------|--------|--------|--------|
| Type           |   | A03                             | A06    | A10    | A16    | A25    |
| HP 011         | 1 | 332.71                          | 250.07 | 184.32 | 152.36 | 128.36 |
|                | 2 | 220.28                          | 165.56 | 74.08  | 59.13  | 37.05  |
|                | 3 | 123.24                          | 92.68  | 41.48  | 33.08  | 20.72  |
|                | 4 | 77.76                           | 58.52  | 28.37  | 22.67  | 16.17  |
| HP 039         | 2 | 70.66                           | 53.20  | 25.77  | 20.57  | 14.67  |
|                | 3 | 36.57                           | 32.28  | 18.00  | 13.38  | 8.00   |
|                | 4 | 26.57                           | 23.27  | 12.46  | 8.80   | 5.58   |
| HP 050         | 1 | 31.75                           | 30.30  | 13.16  | 12.3   | 7.29   |
|                | 2 | 24.25                           | 21.26  | 11.70  | 9.09   | 4.90   |
|                | 3 | 17.37                           | 16.25  | 8.90   | 7.18   | 3.63   |
|                | 4 | 12.12                           | 10.75  | 6.10   | 5.75   | 3.08   |
|                | 5 | 7.00                            | 6.56   | 3.60   | 3.10   | 2.25   |
| HP 135         | 1 | 20.33                           | 18.80  | 9.71   | 8.66   | 4.78   |
|                | 2 | 11.14                           | 10.16  | 6.60   | 6.38   | 2.22   |
|                | 3 | 6.48                            | 6.33   | 3.38   | 3.16   | 2.14   |


| Filter element |   | Absolute filtration<br>H - U Series |        |        |        |        |
|----------------|---|-------------------------------------|--------|--------|--------|--------|
| Type           |   | A03                                 | A06    | A10    | A16    | A25    |
| HP 011         | 1 | 424.58                              | 319.74 | 235.17 | 194.44 | 163.78 |
|                | 2 | 281.06                              | 211.25 | 94.53  | 75.45  | 47.26  |
|                | 3 | 130.14                              | 97.50  | 43.63  | 34.82  | 21.81  |
|                | 4 | 109.39                              | 82.25  | 36.79  | 29.37  | 18.40  |
| HP 039         | 2 | 70.66                               | 53.20  | 25.77  | 20.57  | 14.67  |
|                | 3 | 36.57                               | 32.28  | 18.00  | 13.38  | 8.00   |
|                | 4 | 26.57                               | 23.27  | 12.46  | 8.80   | 5.58   |
| HP 050         | 1 | 47.33                               | 34.25  | 21.50  | 20.50  | 14.71  |
|                | 2 | 29.10                               | 25.95  | 14.04  | 10.90  | 5.88   |
|                | 3 | 20.85                               | 19.50  | 10.68  | 8.61   | 4.36   |
|                | 4 | 14.55                               | 12.90  | 7.32   | 6.90   | 3.69   |
|                | 5 | 9.86                                | 9.34   | 6.40   | 4.80   | 2.50   |
| HP 135         | 1 | 29.16                               | 25.33  | 13.00  | 12.47  | 5.92   |
|                | 2 | 14.28                               | 11.04  | 7.86   | 7.60   | 4.44   |
|                | 3 | 8.96                                | 7.46   | 4.89   | 4.16   | 3.07   |

# FILTER SIZING Selection Software

**Step 1** Select "FILTERS"



**Step 2** Choose filter group (Return Filter, Pressure Filter, etc.)

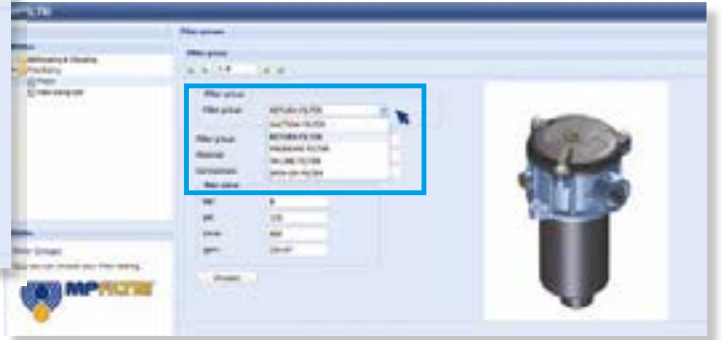

**Step 3** Choose filter type (MPF, MPT, etc.) in function of the max working pressure and the max flow rate



**Step 4** Push "PROCEED"




**Step 5**

Insert all application data to calculate the filter size following the sequence:

- working pressure
- working flow rate
- working pressure drop
- working temperature
- fluid material and fluid type
- filtration media
- connection type

**Step 6**

Push "CALCULATE" to have result; in case of any mistake, the system will advice which parameter is out of range to allow to modify/adjust the selection

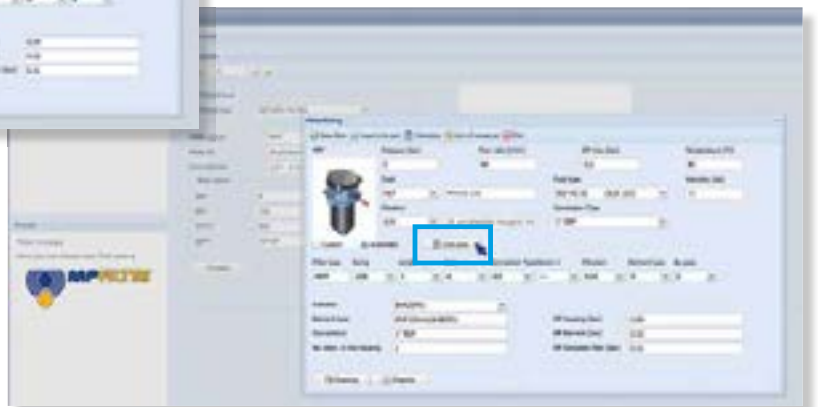

**Step 7**

Download PDF Datasheet "Report.aspx" pushing the button "Drawing"





THE NEW FILTER CONCEPT

MPFX  
MPTX  
MFBX  
MFX  
series

### NEW FILTER ELEMENT WITH EXCLUSIVE INTERFACE CONNECTION

- Protects the machine from improper use of non-original products.
- Safety of constant quality protection & reliability

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.



The products identified as MPFX, MPTX, MFBX and MFX are protected by Italian Patent n° 102015000040473 and by one or more of the following patent applications:

European Patent Pending: n° 16181725.9  
US Patent Pending: n° 15/224,337  
Canadian Patent Pending: n° 2,937,258





# RF2 series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 350 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 2 MPa (20 bar)**  
**Flow rate up to 350 l/min**

RF2250 and RF2350 are ranges of return filters for side tank mounting with integrated shut-off valve for protection of the reservoir against the system contamination.

They are placed below the minimum oil level, directly connected to the return line of the system.

The shut-off valve closes automatically when the cover is removed, allowing the filter element replacement without the fluid drop.

#### Available features:

- Female threaded connections up to 1" and flanged connections up to 1 1/2", for a maximum flow rate of 350 l/min
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic column, to hold the ferrous particles
- Visual, electrical and electronic clogging indicators

#### Common applications:

- Compact mobile machines
- Compact industrial equipment

### Filter housing materials

- Filter body: Aluminium
- Cover: Polyamide, GF reinforced
- Valve: Polyamide, GF reinforced - Steel
- Anti-Emptying valve: Steel

### Bypass valve

Opening pressure 175 kPa (1.75 bar)  $\pm$ 10%

### $\Delta p$ element type

- Microfibre filter elements - series CU: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note


RF2 250-350 filters mounting, see the drawings on page 235 and following




## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     | Volumes [dm <sup>3</sup> ] |     |
|----------------|--------------|-----|----------------------------|-----|
|                | Length       | 1   | Length                     | 1   |
| <b>RF2 250</b> |              | 2.6 |                            | 2.0 |
| <b>RF2 350</b> |              | 2.8 |                            | 2.0 |

Filter housings  $\Delta p$  pressure drop

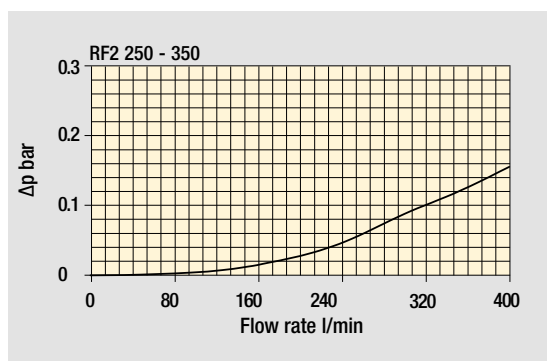

Bypass valve pressure drop

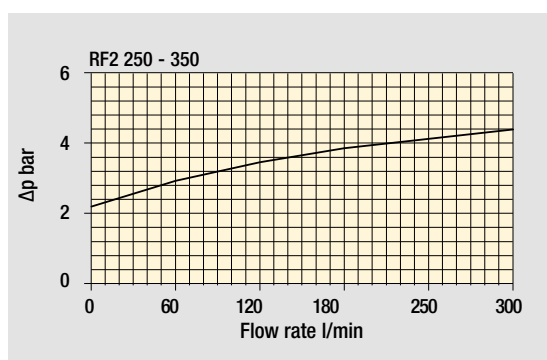

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

Flow rates [l/min]

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |                   |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>RF2 250</b> | <b>1</b> | 148                              | 184 | 278 | 307 | 447 | 615               | 447 | 485 |
| <b>RF2 350</b> | <b>1</b> | 148                              | 184 | 278 | 307 | 447 | 615               | 447 | 485 |

**Maximum flow rate for a complete return filter with a pressure drop  $\Delta p = 0.5 \text{ bar}$ .**


The reference fluid has a kinematic viscosity of  $30 \text{ mm}^2/\text{s}$  (cSt) and a density of  $0.86 \text{ kg/dm}^3$ .

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

Please, contact our Sales Department for further additional information.

Hydraulic symbols

| Filter series  | Style B - E |
|----------------|-------------|
| <b>RF2 250</b> | •           |
| <b>RF2 350</b> | •           |



# RF2 RF2250 - RF2350



## Designation & Ordering code

### COMPLETE FILTER


|   |  |       |  |  |                         |            |            |  |  |
|---|--|-------|--|--|-------------------------|------------|------------|--|--|
| <b>Series and size</b>                  |  |       |  | Configuration example 1: <b>RF2250</b> <b>W</b> <b>F2</b> <b>E</b> <b>M25</b> <b>P01</b> |                         |            |            |  |  |
| <b>RF2250</b>                           |  |       |  | Configuration example 2: <b>RF2350</b> <b>A</b> <b>G1</b> <b>B</b> <b>A25</b> <b>P01</b> |                         |            |            |  |  |
| <b>RF2350</b>                           |  |       |  |  |                         |            |            |  |  |
|   |  |       |  | Filtration rating  |                         |            |            |  |  |
| <b>Seals and treatments</b>             |  |       |  | <b>Axx</b>   | <b>Mxx</b>              | <b>Pxx</b> |            |  |  |
| <b>A</b>                                | NBR                                    |       |  | •  | •                       | •          |            |  |  |
| <b>V</b>                                | FPM                                    |       |  | •  | •                       | •          |            |  |  |
| <b>W</b>                                | NBR compatible with fluids HFA-HFB-HFC |       |  | •  | •                       |            |            |  |  |
| <b>Z</b>                                | FPM compatible with fluids HFA-HFB-HFC |       |  | •  | •                       |            |            |  |  |
| <b>Connections</b>                      |  |       |  | <b>Aux (only RF2350)</b>   |                         | <b>Mxx</b> | <b>Pxx</b> |  |  |
| <b>G1</b>                               | G 1 1/2"                               |       |  | G 1"   |                         | •          | •          |  |  |
| <b>G2</b>                               | 1 1/2" NPT                             |       |  | -  |                         | •          |            |  |  |
| <b>G3</b>                               | SAE 24 - 1 7/8" - 12 UN                |       |  | SAE 16 - 1 5/16" - 12 UN   |                         | •          | •          |  |  |
| <b>G4</b>                               | G 1 1/4"                               |       |  | -  |                         | •          |            |  |  |
| <b>G5</b>                               | 1 1/4" NPT                             |       |  | -  |                         | •          |            |  |  |
| <b>G6</b>                               | SAE 20 - 1 5/8" - 12 UN                |       |  | -  |                         | •          |            |  |  |
| <b>G7</b>                               | G 1"                                   |       |  | -  |                         | •          |            |  |  |
| <b>G8</b>                               | 1" NPT                                 |       |  | -  |                         | •          |            |  |  |
| <b>G9</b>                               | SAE 16 - 1 5/16" - 12 UN               |       |  | -  |                         | •          |            |  |  |
| <b>F1</b>                               | 1 1/2" SAE 3000 psi/M                  |       |  | -  |                         | •          |            |  |  |
| <b>F2</b>                               | 1 1/2" SAE 3000 psi/UNC                |       |  | -  |                         | •          |            |  |  |
| <b>Bypass valve</b>                     |  |       |  |  |                         |            |            |  |  |
| <b>B</b>                                | 1.75 bar                               |       |  |  |                         |            |            |  |  |
| <b>E</b>                                | 3 bar                                  |       |  |  |                         |            |            |  |  |
| <b>Filtration rating (filter media)</b> |  |       |  |  |                         |            |            |  |  |
| <b>A03</b>                              | Inorganic microfiber                   | 3 µm  |  | <b>M25</b>   | Wire mesh               | 25 µm      |            |  |  |
| <b>A06</b>                              | Inorganic microfiber                   | 6 µm  |  | <b>M60</b>   | Wire mesh               | 60 µm      |            |  |  |
| <b>A10</b>                              | Inorganic microfiber                   | 10 µm |  | <b>M90</b>   | Wire mesh               | 90 µm      |            |  |  |
| <b>A16</b>                              | Inorganic microfiber                   | 16 µm |  | <b>P10</b>   | Resin impregnated paper | 10 µm      |            |  |  |
| <b>A25</b>                              | Inorganic microfiber                   | 25 µm |  | <b>P25</b>   | Resin impregnated paper | 25 µm      |            |  |  |
|   |  |       |  | Execution  |                         |            |            |  |  |
|   |  |       |  | <b>P01</b> MP Filtri standard  |                         |            |            |  |  |
|   |  |       |  | <b>Pxx</b> Customized  |                         |            |            |  |  |

### FILTER ELEMENT


|   |                      |   |  |  |                         |            |  |  |  |
|---|----------------------|---|--|--|-------------------------|------------|--|--|--|
| <b>Element series and size</b>          |                      |   |  | Configuration example 1: <b>CU250</b> <b>M25</b> <b>W</b> <b>P01</b> |                         |            |  |  |  |
| <b>CU250</b>                            |                      |   |  | Configuration example 2: <b>CU250</b> <b>A25</b> <b>N</b> <b>P01</b> |                         |            |  |  |  |
| <b>Filtration rating (filter media)</b> |                      |   |  |  |                         |            |  |  |  |
| <b>A03</b>                              | Inorganic microfiber | 3 µm  |  | <b>M25</b>   | Wire mesh               | 25 µm      |  |  |  |
| <b>A06</b>                              | Inorganic microfiber | 6 µm  |  | <b>M60</b>   | Wire mesh               | 60 µm      |  |  |  |
| <b>A10</b>                              | Inorganic microfiber | 10 µm   |  | <b>M90</b>   | Wire mesh               | 90 µm      |  |  |  |
| <b>A16</b>                              | Inorganic microfiber | 16 µm   |  | <b>P10</b>   | Resin impregnated paper | 10 µm      |  |  |  |
| <b>A25</b>                              | Inorganic microfiber | 25 µm   |  | <b>P25</b>   | Resin impregnated paper | 25 µm      |  |  |  |
| <b>Seals and treatments</b>             |                      |   |  | Filtration rating  |                         |            |  |  |  |
|   |                      |   |  | <b>Axx</b>   | <b>Mxx</b>              | <b>Pxx</b> |  |  |  |
| <b>N</b>                                | NBR                  |   |  | •  | •                       | •          |  |  |  |
| <b>V</b>                                | FPM                  |   |  | •  | •                       | •          |  |  |  |
| <b>W</b>                                | NBR head anodized    | filter element compatible with fluids HFA-HFB-HFC |  | •  | •                       |            |  |  |  |
| <b>Z</b>                                | FPM head anodized    | filter element compatible with fluids HFA-HFB-HFC |  | •  | •                       |            |  |  |  |
|   |                      |   |  | Execution  |                         |            |  |  |  |
|   |                      |   |  | <b>P01</b> MP Filtri standard  |                         |            |  |  |  |
|   |                      |   |  | <b>Pxx</b> Customized  |                         |            |  |  |  |

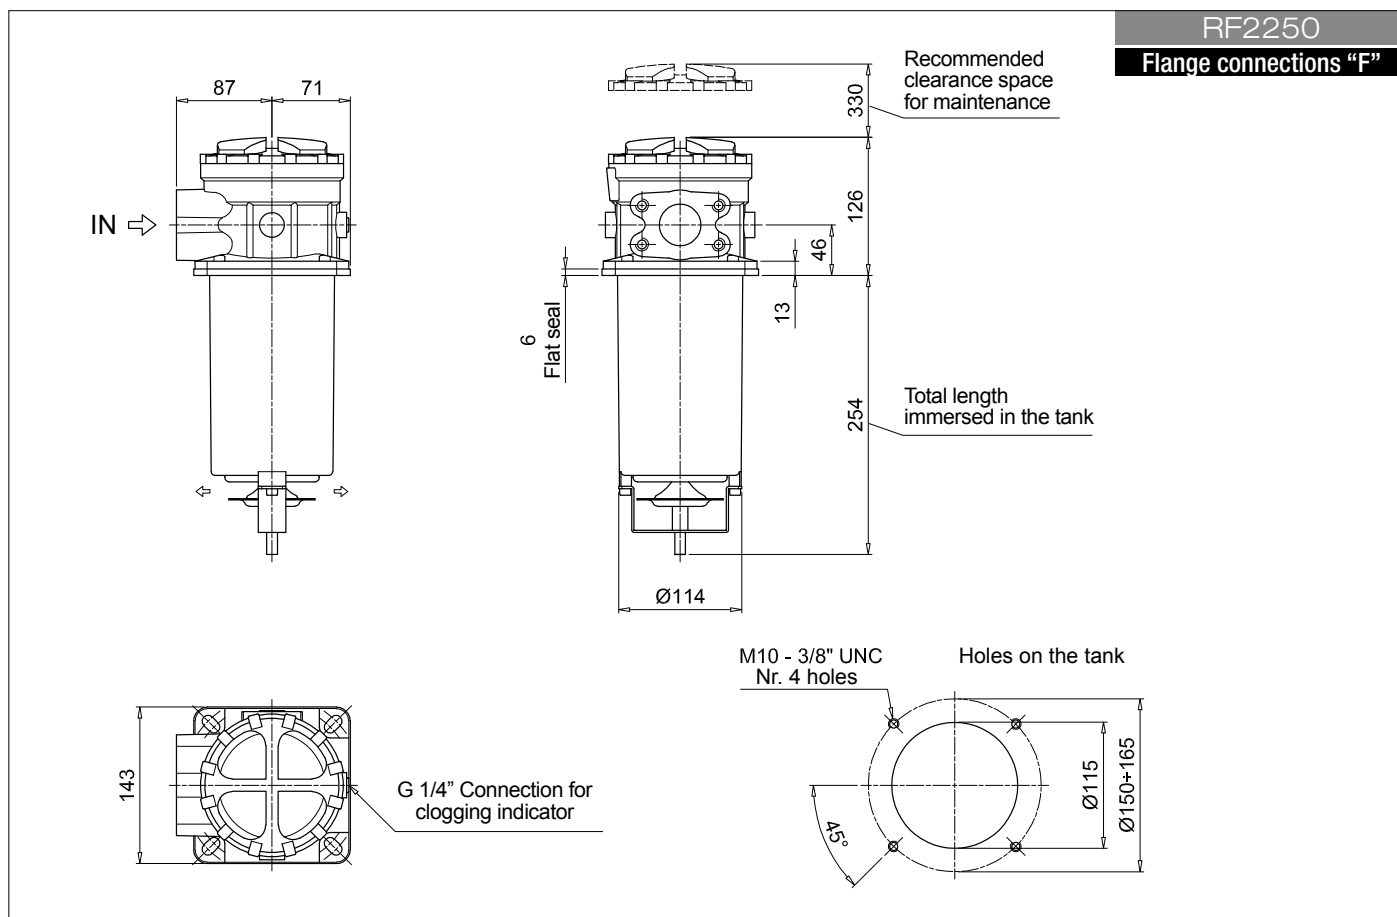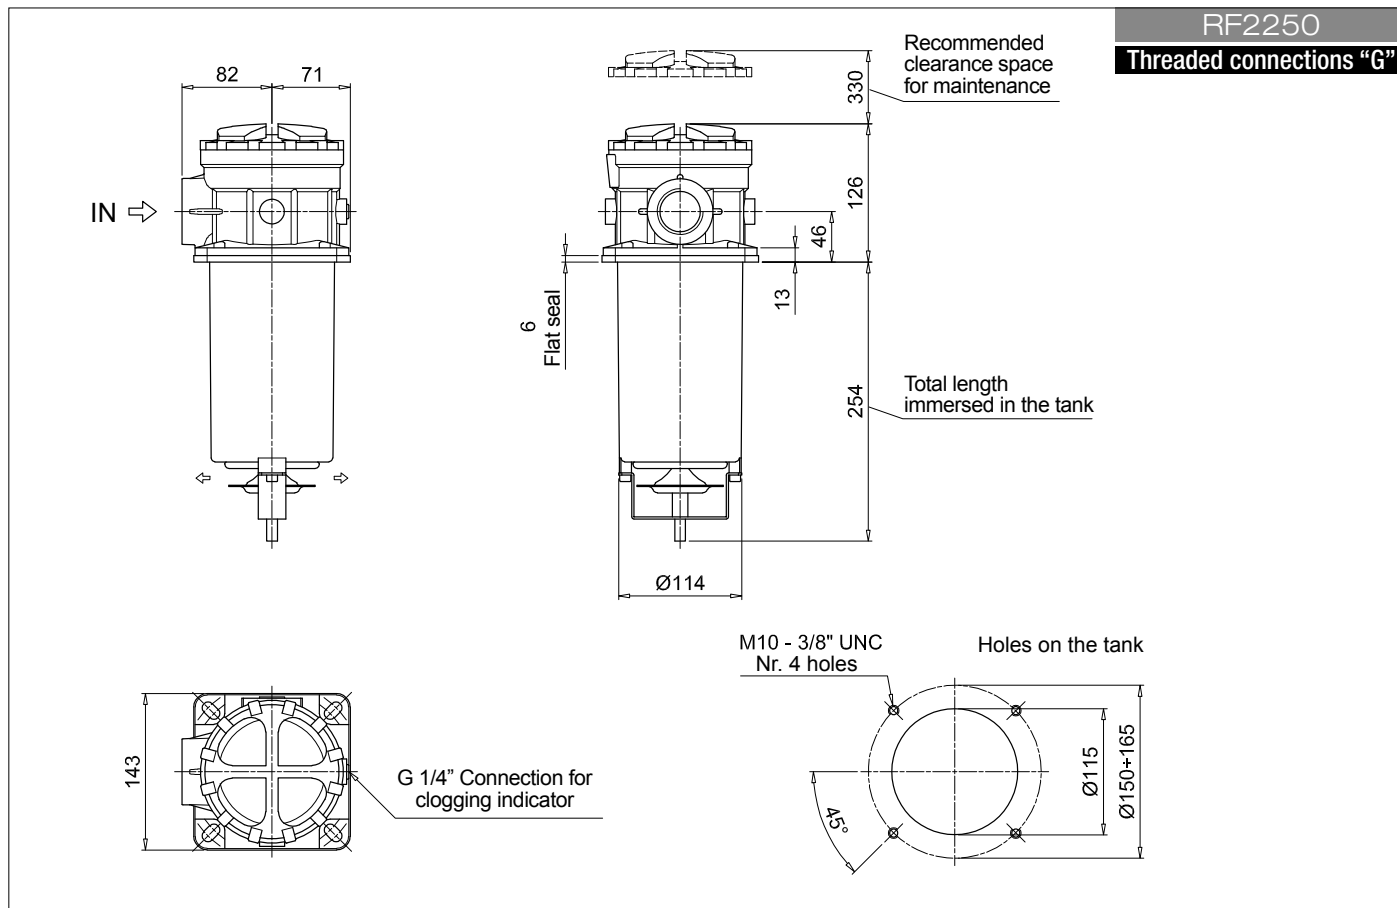

## Dimensions

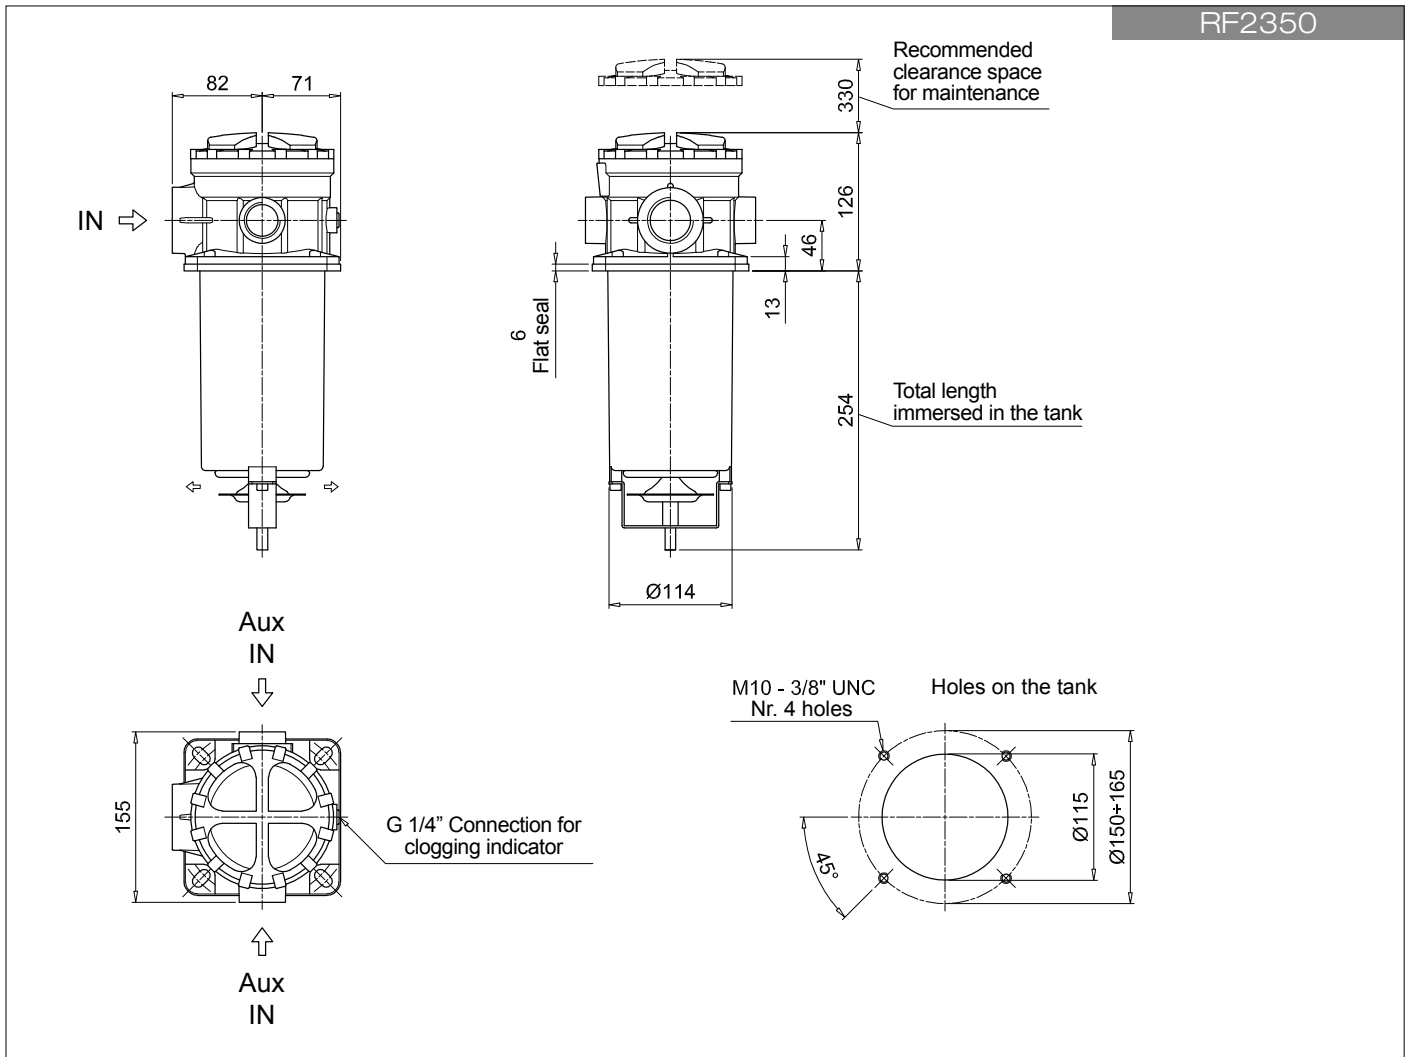

RF2 250 - 350

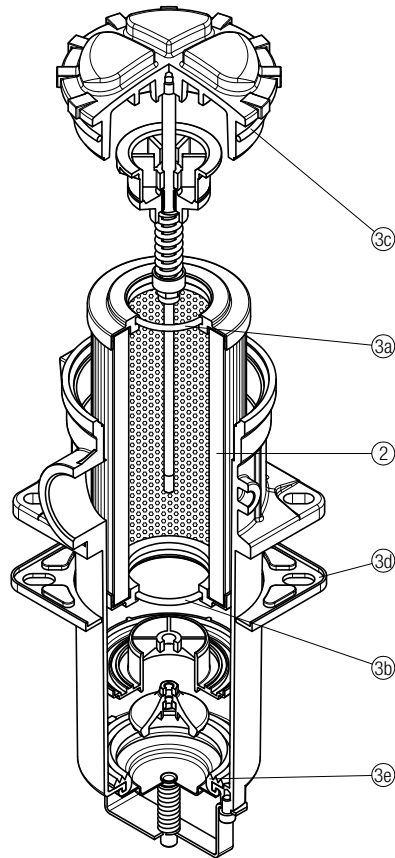

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
| RF2 250       | See order table | NBR                  | FPM      |
| RF2 350       | See order table | 02050586             | 02050587 |