

**NEW**

High Pressure filters

# FHP 350 series

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 500 l/min



**PASSION TO PERFORM**



# FILTER SIZING

**THE CORRECT FILTER SIZING HAVE TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING BY THE APPLICATION. THE MAXIMUM TOTAL PRESSURE DROP ALLOWED BY A NEW AND CLEAN HIGH PRESSURE PRESSURE FILTER HAVE TO BE IN THE RANGE 0.8 ÷ 1.5 bar.**

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop  $\Delta p_c$  of the housing is proportional to the fluid density ( $\text{kg}/\text{dm}^3$ ); all the graphs in the catalogue are referred to mineral oil with density of  $0.86 \text{ kg}/\text{dm}^3$ . The filter element pressure drop  $\Delta p_e$  is proportional to its viscosity ( $\text{mm}^2/\text{s}$ ), the corrective factor  $Y$  have to be used in case of an oil viscosity different than  $30 \text{ mm}^2/\text{s}$  (cSt).

## Sizing data for single filter element, head at top

$\Delta p_c$  = Filter housing pressure drop [bar]

$\Delta p_e$  = Filter element pressure drop [bar]

$Y$  = Corrective factor  $Y$  (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media

$Q$  = flow rate (l/min)

$V_1$  reference oil viscosity =  $30 \text{ mm}^2/\text{s}$  (cSt)

$V_2$  = operating oil viscosity in  $\text{mm}^2/\text{s}$  (cSt)

## Filter element pressure drop calculation with an oil viscosity different than $30 \text{ mm}^2/\text{s}$ (cSt)

$\Delta p_e = Y : 1000 \times Q \times (V_2 : V_1)$

$\Delta p_{\text{Tot.}} = \Delta p_c + \Delta p_e$

## Verification formula

$\Delta p_{\text{Tot.}} \leq \Delta p_{\text{max allowed}}$

## Maximum total pressure drop ( $\Delta p_{\text{max}}$ ) allowed by a new and clean filter

Application	Range (bar)
Suction filters	0.08 ÷ 0.10
Return filters	0.4 ÷ 0.6
Low & Medium Pressure filters	0.4 ÷ 0.6 return lines
	0.3 ÷ 0.5 lubrication lines
	0.3 ÷ 0.4 off-line in power systems
	0.1 ÷ 0.3 off-line in test benches
0.4 ÷ 0.6 over-boost	
High Pressure filters	0.8 ÷ 1.5
Stainless Steel filters	0.8 ÷ 1.5

## FHP350 calculation example

Application data:

High pressure filter

Pressure  $P_{\text{max}} = 300 \text{ bar}$

Flow rate  $Q = 300 \text{ l}/\text{min}$

Viscosity  $V_2 = 46 \text{ mm}^2/\text{s}$  (cSt)


Oil density =  $0.86 \text{ kg}/\text{dm}^3$

Required filtration efficiency =  $25 \mu\text{m}$  with absolute filtration

With bypass valve and  $1 \frac{1}{4}$ " inlet connection

Calculation:

$\Delta p_c = 0.7 \text{ bar}$  (see graphic below)

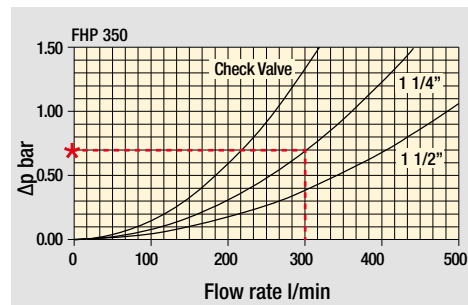

Filter housings  $\Delta p$  pressure drop.

The curves are plotted using mineral oil with density of  $0.86 \text{ kg}/\text{dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

$\Delta p_e = (0.88 : 1000) \times 300 \times (46 : 30) = 0.41$

## FHP350 corrective factor

Corrective factor  $Y$  to be used for the filter element pressure drop calculation.

The values depend to the filter size and length and to the filter media.

Reference oil viscosity  $30 \text{ mm}^2/\text{s}$

Filter element Type	Absolute filtration N - R Series					Nominal filtration N Series	
	A03	A06	A10	A16	A25	M25	
HP 320	1	10.88	9.73	5.02	3.73	2.54	1.04
	2	4.40	3.83	1.75	1.48	0.88	0.71
	3	2.75	2.11	1.05	0.87	0.77	0.61
	4	2.12	1.77	0.98	0.78	0.55	0.47

$\Delta p_{\text{Tot.}} = 0.7 + 0.41 = 1.11 \text{ bar}$

The selection is correct because the total pressure drop value is inside the admissible range for high pressure filters.

In case the allowed max total pressure drop is not verified, it is necessary to repeat the calculation changing the filter length.

Flow rates [l/min]

Filter series	Length	Filter element design - H Series					Filter element design - N Series					
		A03	A06	A10	A16	A25	A03	A06	A10	A16	A25	M25
FHP 350	1	108	115	188	197	301	127	140	234	282	343	451
	2	196	225	317	323	396	256	278	394	415	465	480
	3	266	310	384	392	440	331	370	450	466	475	490
	4	308	333	391	398	445	369	393	456	474	495	503

## Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5 \text{ bar}$ .

The reference fluid has a kinematic viscosity of  $30 \text{ mm}^2/\text{s}$  (cSt) and a density of  $0.86 \text{ kg}/\text{dm}^3$ .

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

Please, contact our Sales Department for further additional information.

**Corrective factor Y**  
to be used for the filter element pressure drop calculation.

The values depend to the filter size and length and to the filter media.

Reference oil viscosity 30 mm<sup>2</sup>/s

**High pressure filters**

Filter element	Absolute filtration N - R Series					Nominal filtration	
	Type	A03	A06	A10	A16	A25	N Series M25
HP 011	1	332.71	250.07	184.32	152.36	128.36	-
	2	220.28	165.56	74.08	59.13	37.05	-
	3	123.24	92.68	41.48	33.08	20.72	-
	4	77.76	58.52	28.37	22.67	16.17	-
HP 039	1	70.66	53.20	25.77	20.57	14.67	4.90
	2	36.57	32.28	18.00	13.38	8.00	2.90
	3	26.57	23.27	12.46	8.80	5.58	2.20
HP 050	1	31.75	30.30	13.16	12.3	7.29	1.60
	2	24.25	21.26	11.70	9.09	4.90	1.40
	3	17.37	16.25	8.90	7.18	3.63	1.25
	4	12.12	10.75	6.10	5.75	3.08	1.07
	5	7.00	6.56	3.60	3.10	2.25	0.80
HP 065	1	58.50	43.46	23.16	19.66	10.71	1.28
	2	42.60	25.64	16.22	13.88	7.32	1.11
	3	20.50	15.88	8.18	6.81	3.91	0.58
HP 135	1	20.33	18.80	9.71	8.66	4.78	2.78
	2	11.14	10.16	6.60	6.38	2.22	1.11
	3	6.48	6.33	3.38	3.16	2.14	1.01
HP 150	1	17.53	15.91	7.48	6.96	5.94	1.07
	2	8.60	8.37	3.54	3.38	3.15	0.58
	3	6.53	5.90	2.93	2.79	2.12	0.49
HP 320	1	10.88	9.73	5.02	3.73	2.54	1.04
	2	4.40	3.83	1.75	1.48	0.88	0.71
	3	2.75	2.11	1.05	0.87	0.77	0.61
	4	2.12	1.77	0.98	0.78	0.55	0.47
HP 500	1	4.44	3.67	2.30	2.10	1.65	0.15
	2	3.37	2.77	1.78	1.68	1.24	0.10
	3	2.22	1.98	1.11	1.09	0.75	0.08
	4	1.81	1.33	0.93	0.86	0.68	0.05
	5	1.33	1.15	0.77	0.68	0.48	0.04

Filter element	Absolute filtration N Series					Nominal filtration	
	Type	A03	A06	A10	A16	A25	N Series M25
HF 320	1	3.65	2.95	2.80	1.80	0.90	0.38
	2	2.03	1.73	1.61	1.35	0.85	0.36
	3	1.84	1.42	1.32	1.22	0.80	0.35

# FHP350 GENERAL INFORMATION

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 42 MPa (420 bar)**

**Flow rate up to 500 l/min**

FHP is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the industrial equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2", for a maximum return flow rate of 500 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Reverse flow valve, to allow bidirectional flow through the filter housing. The back flow is not filtered. The filter requires the use of internal check valves to direct the flow through the element in one direction and around the element in the other
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment or mobile machines

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Bypass valve: Brass / AISI 304
- Reverse Flow: Steel
- Check valve: Steel

#### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar)  $\pm 10\%$
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N-R: 20 bar
- Microfibre filter elements - series H-S: 210 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections


In-line Inlet/Outlet

#### Note


FHP350 filters are provided for vertical mounting




## Pressure drop

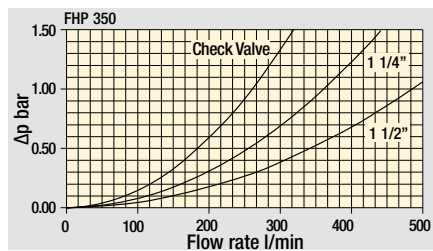

Filter housings  
 $\Delta p$  pressure drop

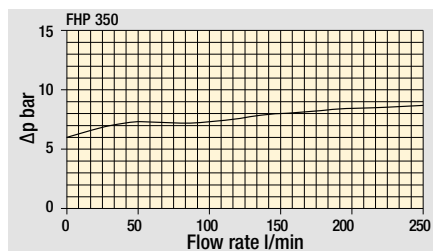

Bypass valve  
pressure drop

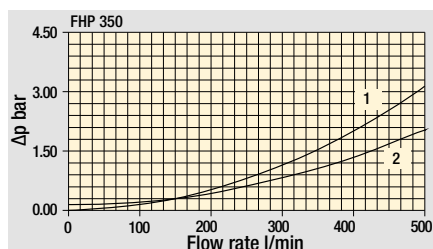


Valves  
Pressure drop with reverse flow valves in  
1 - Filtering direction  
2 - Opposite direction

## Weights [kg] and volumes [dm<sup>3</sup>]

	Length	1	2	3	4
<b>FHP 350 - Weights</b>		13.95	16.08	18.37	20.85
<b>FHP 350 - Volumes</b>		1.00	1.72	2.49	3.32

## Hydraulic symbols

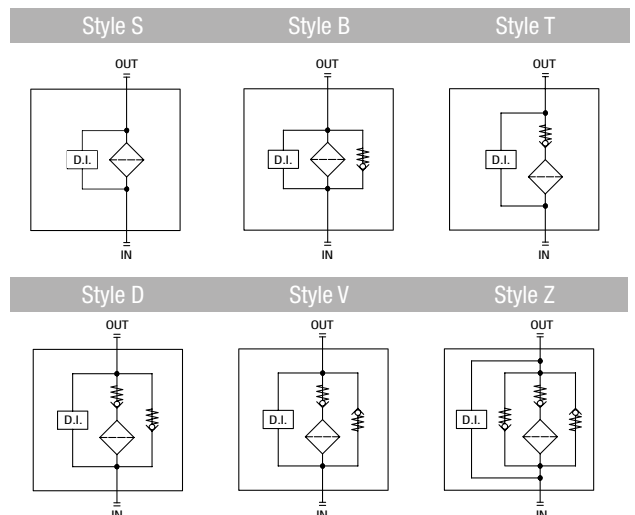

# FHP350

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FHP350** | **4** | **B** | **A** | **D** | **2** | **A06** | **N** | **P01**

**FHP350**

Length  
**1** | **2** | **3** | **4**

Valves  
**S** Without bypass  
**B** With bypass 6 bar  
**T** With check valve, without bypass  
**D** With check valve, with bypass 6 bar  
**V** With reverse flow, without bypass  
**Z** With reverse flow, with bypass 6 bar

Seals  
**A** NBR  
**V** FPM

Connections  
**A** G 1 1/2"  
**B** 1 1/2" NPT  
**C** SAE 24 - 1 7/8" - 12 UN  
**D** 1 1/2" SAE 3000 psi/M + G 1 1/4"  
**E** 1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT  
**F** 1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" - 12 UN  
**G** 1 1/4" SAE 3000 psi/M  
**H** 1 1/4" SAE 3000 psi/UNC  
**I** 1 1/4" SAE 6000 psi/M  
**L** 1 1/4" SAE 6000 psi/UNC

Connection for differential indicator  
**2** With connection

Filtration rating (filter media)		Valves						Execution					
Element	Δp	S	B	T	D	V	Z	Filter length					
<b>A03</b>	Inorganic microfiber 3 μm		•					<b>P01</b>	MP Filtri standard	•	•	•	•
<b>A06</b>	Inorganic microfiber 6 μm							<b>P02</b>	Maintenance from the bottom of the housing				•
<b>A10</b>	Inorganic microfiber 10 μm							<b>Pxx</b>	Customized				
<b>A16</b>	Inorganic microfiber 16 μm												
<b>A25</b>	Inorganic microfiber 25 μm												
<b>M25</b>	Wire mesh 25 μm												
<b>N</b>	20 bar												
<b>R</b>	20 bar				•		•						
<b>H</b>	210 bar	•											
<b>S</b>	210 bar			•			•						

### FILTER ELEMENT

Element series and size Configuration example: **HP320** | **4** | **A06** | **A** | **N** | **P01**

**HP320**

Element length  
**1** | **2** | **3** | **4**

Filtration rating (filter media)		Seals		Element Δp		Execution	
Element	Rating	A	V	N	R	H	S
<b>A03</b>	Inorganic microfiber 3 μm						
<b>A06</b>	Inorganic microfiber 6 μm						
<b>A10</b>	Inorganic microfiber 10 μm						
<b>A16</b>	Inorganic microfiber 16 μm						
<b>A25</b>	Inorganic microfiber 25 μm						
<b>M25</b>	Wire mesh 25 μm						
<b>N</b>	20 bar						
<b>R</b>	20 bar						
<b>H</b>	210 bar						
<b>S</b>	210 bar						
<b>P01</b>	MP Filtri standard						
<b>Pxx</b>	Customized						

### ACCESSORIES

Differential indicators	
<b>DEA</b>	Electrical differential indicator
<b>DEH</b>	Hazardous area electronic differential indicator
<b>DEM</b>	Electrical differential indicator
<b>DLA</b>	Electrical / visual differential indicator
<b>DLE</b>	Electrical / visual differential indicator
<b>DTA</b>	Electronic differential indicator
<b>DVA</b>	Visual differential indicator
<b>DVM</b>	Visual differential indicator


Additional features  
**T2** Plug



# FHP350


## Dimensions

Filter length	H [mm]	H2 [mm]		Connections	R
		Execution P01	P02		
1	295	150	-	A	M12
2	418	150	-	B - C	1/2" UNC
3	550	150	-	D	M12
4	703	150	550	E - F	1/2" UNC
				G	M12
				H	1/2" UNC
				I	M12
				L	1/2" UNC

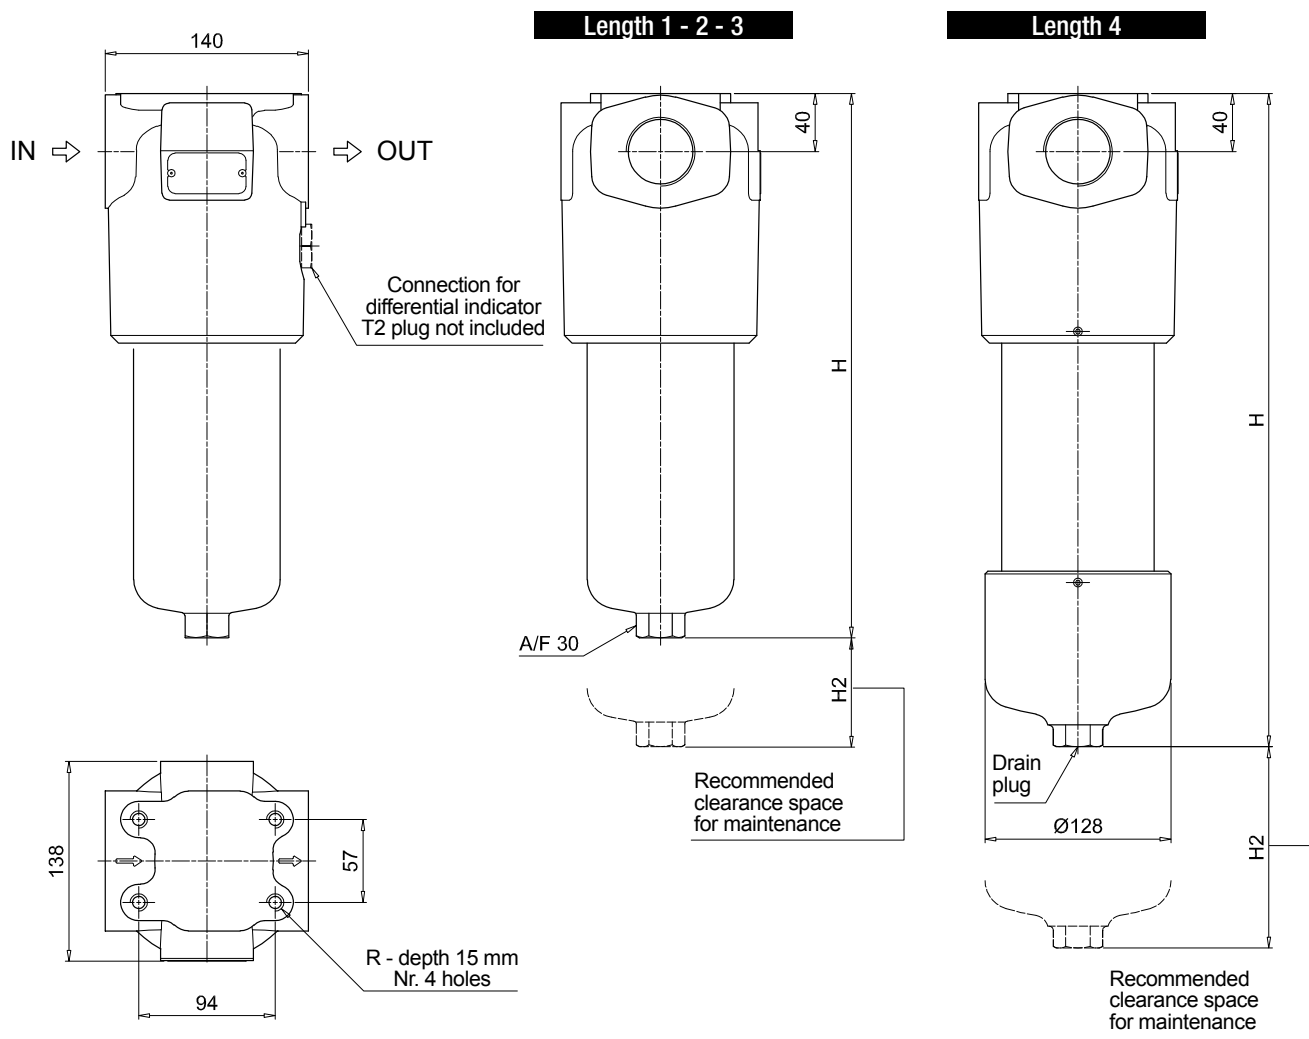

# FHP350 SPARE PARTS

Order number for spare parts

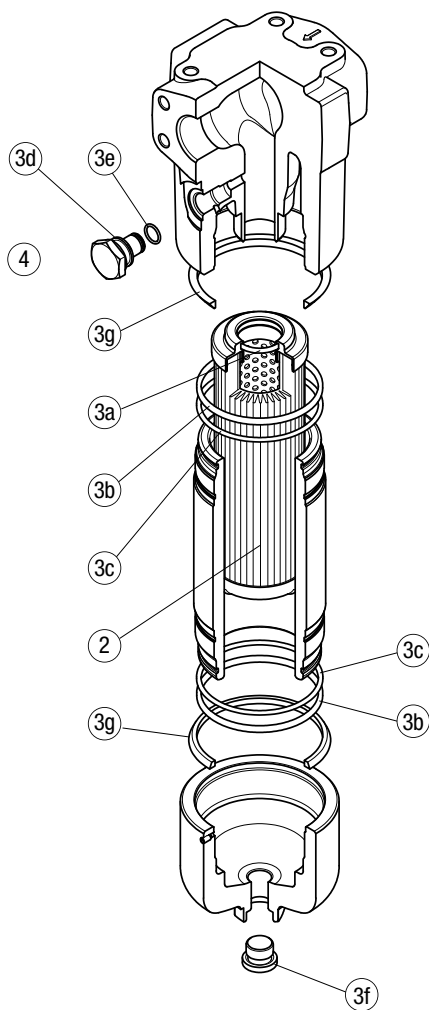

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.		Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number		Indicator connection plug	
FHP 350	See order table	NBR	FPM	NBR	FPM
		02050272	02050283	T2H	T2V

All data, details and words contained in this publication are provided for information purposes only. MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and / or commercial reasons. The colors and the pictures of the products are purely indicative. Any reproduction, partial or total, of this document is strictly forbidden. All rights are strictly reserved.



## WORLDWIDE NETWORK

### HEADQUARTERS

**MP Filtri S.p.A.**  
Pessano con Bornago  
Milano - Italy  
+39 02 957031  
sales@mpfiltri.it

### BRANCH OFFICES

**ITALFILTRI LLC**  
Moscow - Russia  
+7 (495) 220 94 60  
mpfiltrirussia@yahoo.com

**MP Filtri Canada Inc.**  
Concord, Ontario - Canada  
+1 905 303 1369  
sales@mpfiltricanada.com

**MP Filtri France SAS**  
Villeneuve la Garenne  
Paris - France  
+33 (0)1 40 86 47 00  
sales@mpfiltrifrance.com

**MP Filtri Germany GmbH**  
St. Ingbert - Germany  
+49 (0) 6894 95652 2-0  
sales@mpfiltri.de

**MP Filtri India Pvt. Ltd.**  
Bangalore - India  
+91 80 4147 7444 / +91 80 4146 1444  
sales@mpfiltri.co.in

**MP Filtri (Shanghai) Co., Ltd.**  
Shanghai - Minhang District - China  
+86 21 58919916 116  
sales@mpfiltrishanghai.com

**MP Filtri U.K. Ltd.**  
Bourton on the Water  
Gloucestershire - United Kingdom  
+44 (0) 1451 822 522  
sales@mpfiltri.co.uk

**MP Filtri U.S.A. Inc.**  
Quakertown, PA - U.S.A.  
+1 215 529 1300  
sales@mpfiltriusa.com

**PASSION TO PERFORM**



mpfiltri.com