

### THE CONCEPT FOR OUR FILTERS

Protect the performance of your system with MYclean. Quality and efficiency are fundamental for MP Filtri: this exclusive new filter element possesses polygon shape geometry and specific seal that ensures only original spare parts can be used - ensuring correct operation and higher system reliability.

## FMMX 050 series

## with MYCLEAN HPX 050 Filter Element



Protects the machine from improper use of non-original products.

Safety of constant quality protection & reliability

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.

The products identified as FMMX 050 are protected by:

- Italian Patent n° 102014902261205
- Canadian Patent n° 2,937,258
- European Patent nº 16181725.9
- US Patent nº 15/224,337

TOGETHER WITH Maawe, AS OPTION, FMMX 050 SERIES CAN BE PROVIDED WITH

# Zerospark+



### THE $\mathbb{Z}$ CONCEPT FOR OUR FILTERS

Zerospark<sup>®</sup> is a specialist solution designed to solve the problem of electrostatic discharge inside hydraulic filters. Caused by the electrical charge build-up due to the passage of oil through the filters, this can result in damage to filter elements, oils and circuit components. It can even cause fire hazards in environments where flammable materials are present.



FMMX 050 series

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 154 I/min





# FMMX 050 general information

#### Description

#### **High Pressure filters**

#### In-line

Maximum working pressure up to 42 MPa (420 bar) Flow rate up to 154 l/min

FMMX is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines.

They are directly connected to the lines of the system through the hydraulic fittings.

**Available features:** 

- Female threaded connections up to 1 1/4", for a maximum flow rate of 250 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve  $% \left( {{{\bf{n}}_{\rm{s}}}} \right) = {{\bf{n}}_{\rm{s}}} \left( {{{\bf{n}}_{\rm{s}}}} \right)$
- Visual, electrical and electronic differential clogging indicators
- MYclean interface connection for the filter element, to protect the product against non-original spare parts.
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

**Common applications:** 

- Agricultural machines
- Mobile machines

#### Technical data

#### Filter housing materials

- Head: Painted cast iron, black RAL 9005
- Housing: Phosphatized steel
- Bypass valve: Steel

#### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

#### **Bypass valve**

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### ∆p element type

- Microfiber filter elements series N: 20 bar
- Wire mesh filter elements series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

Temperature From -25 °C to +110 °C

Connections In-line Inlet/Outlet

**Note** FMMX filters are provided for vertical mounting

#### Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series | Weights [kg] |      |      |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |      |  |
|---------------|--------------|------|------|------|------|------|----------------------------|------|------|------|------|------|--|
|               | Length       |      |      |      |      |      | Length                     |      |      |      |      |      |  |
| FMMX 050      |              | 3.11 | 3.48 | 3.90 | 4.36 | 5.54 |                            | 0.34 | 0.48 | 0.63 | 0.81 | 1.23 |  |
|               |              |      |      |      |      |      |                            |      |      |      |      |      |  |



### FILTER ASSEMBLY SIZING

Flow rates [l/min]


|               |        | Filter element design - N Series |     |     |     |     |     |  |  |  |  |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-----|--|--|--|--|
| Filter series | Length | A03                              | A06 | A10 | A16 | A25 | M25 |  |  |  |  |
|               | 1      | 42                               | 43  | 79  | 82  | 106 | 147 |  |  |  |  |
|               | 2      | 52                               | 57  | 85  | 96  | 121 | 149 |  |  |  |  |
| FMMX 050      | 3      | 66                               | 69  | 97  | 106 | 130 | 150 |  |  |  |  |
|               | 4      | 83                               | 89  | 113 | 115 | 134 | 152 |  |  |  |  |
|               | 5      | 107                              | 110 | 130 | 134 | 141 | 154 |  |  |  |  |

Maximum flow rate for a complete pressure filter with a pressure drop  $\Delta p = 1.5$  bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

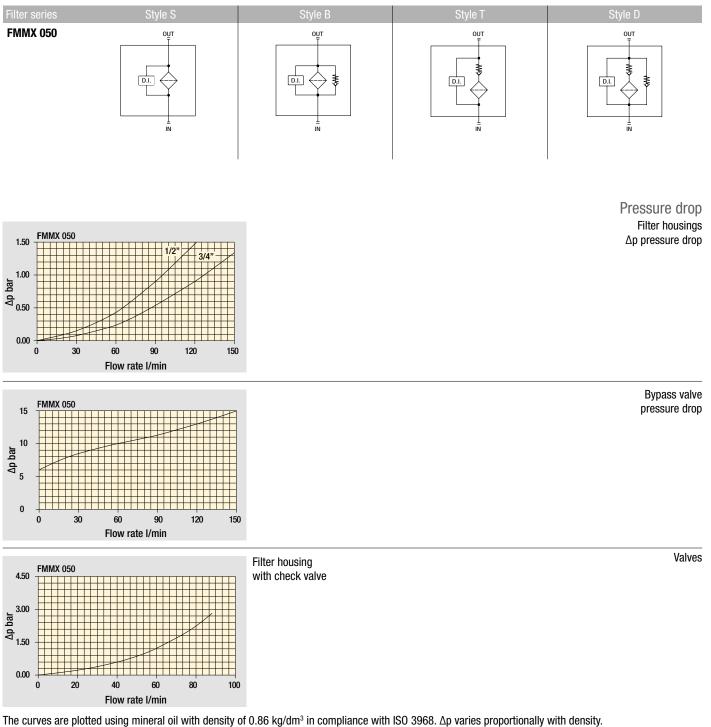

(())) MPALTRI

Hydraulic symbols


445

## FMMX 05C

### Designation & Ordering code

|          |  |                         | COMP    | LETE FILTER          |       |   |   |   |   |     |   |     |
|----------|--|-------------------------|---------|----------------------|-------|---|---|---|---|-----|---|-----|
| Ser      | ies and size                             |                         | Config  | uration example: FMN | MX050 | 3 | В | Α | G | A10 | N | P01 |
|          |  | Filter Element          |         | L. L.                |       |   |   |   |   |     |   |     |
| Ler      | ath                                      |                         |         |                      |       |   |   |   |   |     |   |     |
| 1        |  |                         |         |                      |       |   |   |   |   |     |   |     |
|          |  |                         |         |                      |       |   |   |   |   |     |   |     |
| Val      | ves                                      |                         |         | l                    |       |   |   |   |   |     |   |     |
| В        | With bypass 6 bar                        |                         |         | _                    |       |   |   |   |   |     |   |     |
| D        | With check valve, with bypass            | 6 bar                   |         | _                    |       |   |   |   |   |     |   |     |
|          |  |                         |         |                      |       |   |   |   |   |     |   |     |
| Sea      |  |                         |         |                      |       |   |   |   |   |     |   |     |
| <u>A</u> | NBR                                      |                         |         | _                    |       |   |   |   |   |     |   |     |
| V        | FPM                                      |                         |         | -                    |       |   |   |   |   |     |   |     |
| Cor      | nections                                 |                         |         |                      |       |   |   |   |   |     |   |     |
|          | M18x1.5 - ISO 6149                       | <b>E</b> 1/2" NPT       |         | L                    |       |   |   |   |   |     |   |     |
| A<br>B   | M18X1.5 - ISO 6149<br>M22x1.5 - ISO 6149 | <b>F</b> 3/4" NPT       |         | -                    |       |   |   |   |   |     |   |     |
| C        | G 1/2"                                   | <b>G</b> SAE 8 - 3/4" - | 16 LINE | -                    |       |   |   |   |   |     |   |     |
| D        | G 3/4"                                   | H SAE 12 - 1 1/1        |         | -                    |       |   |   |   |   |     |   |     |
|          |  |                         |         | -                    |       |   |   |   |   |     |   |     |
|          |  |                         |         |                      |       |   |   |   |   |     |   |     |
| File     | ration rating (filter media)             | Element An              |         |                      |       |   |   |   |   |     |   |     |

| Filtration rating (filter media) | Element ∆p |      |            |   |
|----------------------------------|------------|------|------------|---|
| A03 Inorganic microfiber 3 µ     | n N 20 bar |      |            | Executions                                |
| A06 Inorganic microfiber 6 µ     | n          | Base | zerospark* | Exocutions                                |
| A10 Inorganic microfiber 10 µ    | n          | P01  | Z01        | Upper connection for clogging indicator   |
| A16 Inorganic microfiber 16 µr   | n          | P02  | Z02        | Without connection for clogging indicator |
| A25 Inorganic microfiber 25 µr   | n          | P03  | Z03        | Frontal connection for clogging indicator |
| M25 Wire mesh 25 µr              | n          | Рхх  | Zxx        | Customized                                |

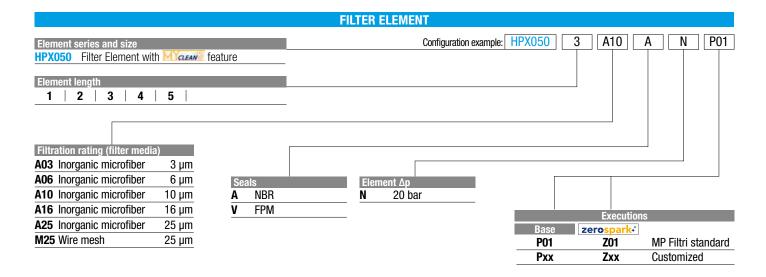

|     | CLOGG                                      | See page 687 |                                   |  |
|-----|--|--------------|-----------------------------------|--|
| DEA | Electrical differential indicator          | DTA          | Electrical differential indicator |  |
| DEM | Electrical differential indicator          | DVA          | Visual differential indicator     |  |
| DLA | Electrical / visual differential indicator | DVM          | Visual differential indicator     |  |
| DLE | Electrical / visual differential indicator |              |                                   |  |

T2 Differential indicator plug

446)


PLUGS

(()) MPALTRI

See page 706

## FMMX 050

Dimensions

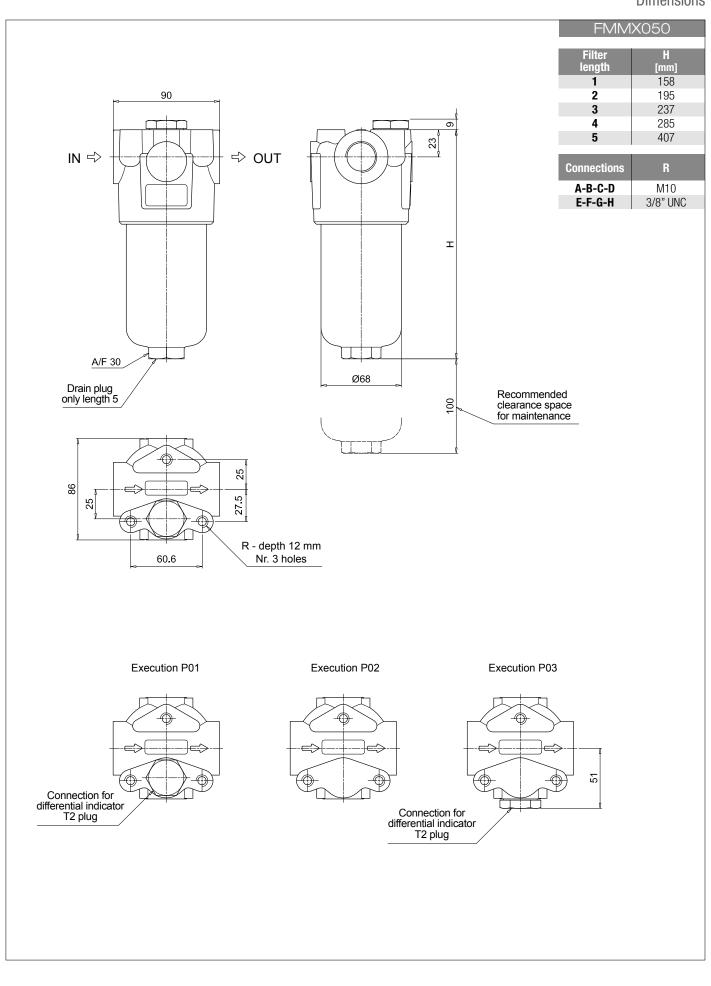




## FMMX 050 spare parts

### Order number for spare parts

FMMX 050

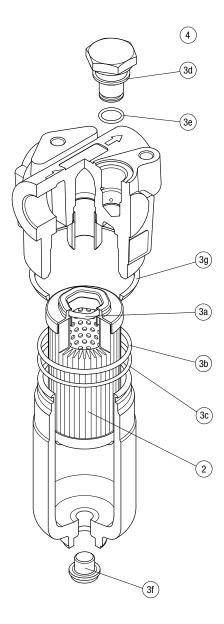

|                  | Q.ty: 1 pc.           | Q.ty:              | 1 pc.            | Q.ty: 1 pc.          |                      |  |  |
|------------------|-----------------------|--------------------|------------------|----------------------|----------------------|--|--|
| Item:            | 2                     | 3                  | (3a ÷ 3g)        | 4                    |                      |  |  |
| Filter<br>series | Filter<br>element     | Seal Kit co<br>NBR | de number<br>FPM | Indicator cor<br>NBR | nnection plug<br>FPM |  |  |
| FMMX 050         | See<br>order<br>table | 02050864           | 02050865         | T2H                  | T2V                  |  |  |

448-

